



# 500136 CALEX SM Navigation 24V 12cd >10W Bay15d

Standard	EN 14744
Nominal voltage	24.0 V
Power consumption	Max. 18 W
Luminous intensity	12 to 20 cd
Lifetime	Minimum 1000 hours
Diameter max.	26 mm
Length max.	70 mm
Light center length	35 ± 1 mm
Cap	Bay15d, Nickel plated brass
Glass color	Clear
Numbers per box	50 pieces

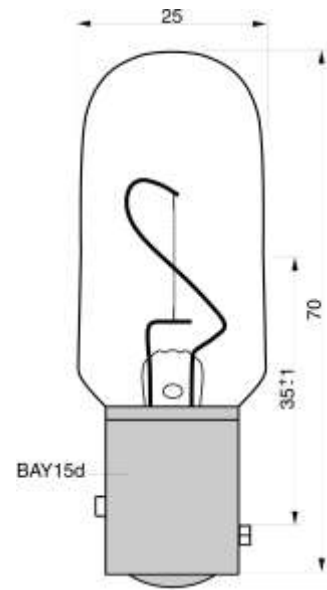

## Candlepower light distribution

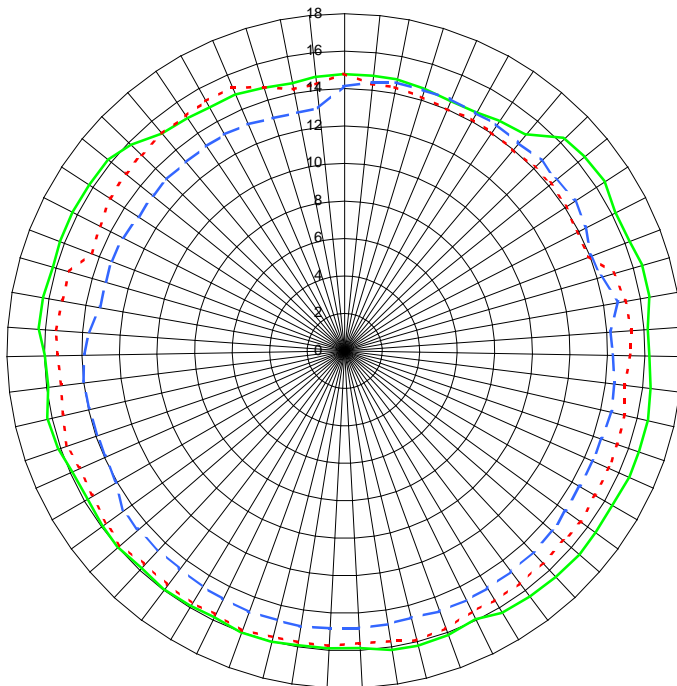

Date: 01.12.22  
 SM number: 10130  
 Type: 24V 12cd >10W  
 Voltage: 24.00 [V]  
 Current: 625[mA]  
 Power: 15.00 [W]  
 Responsible: Jan Vesterlund

Curve 1: Horizontal 0°  
 Curve 2: Horizontal -30°  
 Curve 3: Horizontal +30°



CALEX 500136

**SM no. 10130**

21. March 2024